



# ➤ GAS/LPG FORKLIFT



PERFORMING PERFECT  
RESULT FOR VARIOUS

CAPACITY	LIFTING HEIGHT
2,000kg 3,200kg	3,000mm




ACCESSORIES

### ATTACHMENTS ARE AVAILABLE

- LPG Low Fuel Indicator
- Front Combo Lights
- Semi-suspension seat

### • 3 Outstanding Features

- Hydraulic pump offer quieter and smoother operation and less noise.
- More foot and leg room with plenty of head room under the overhead guard.
- All aluminium radiator increases air flow and dissipates heat more efficiently

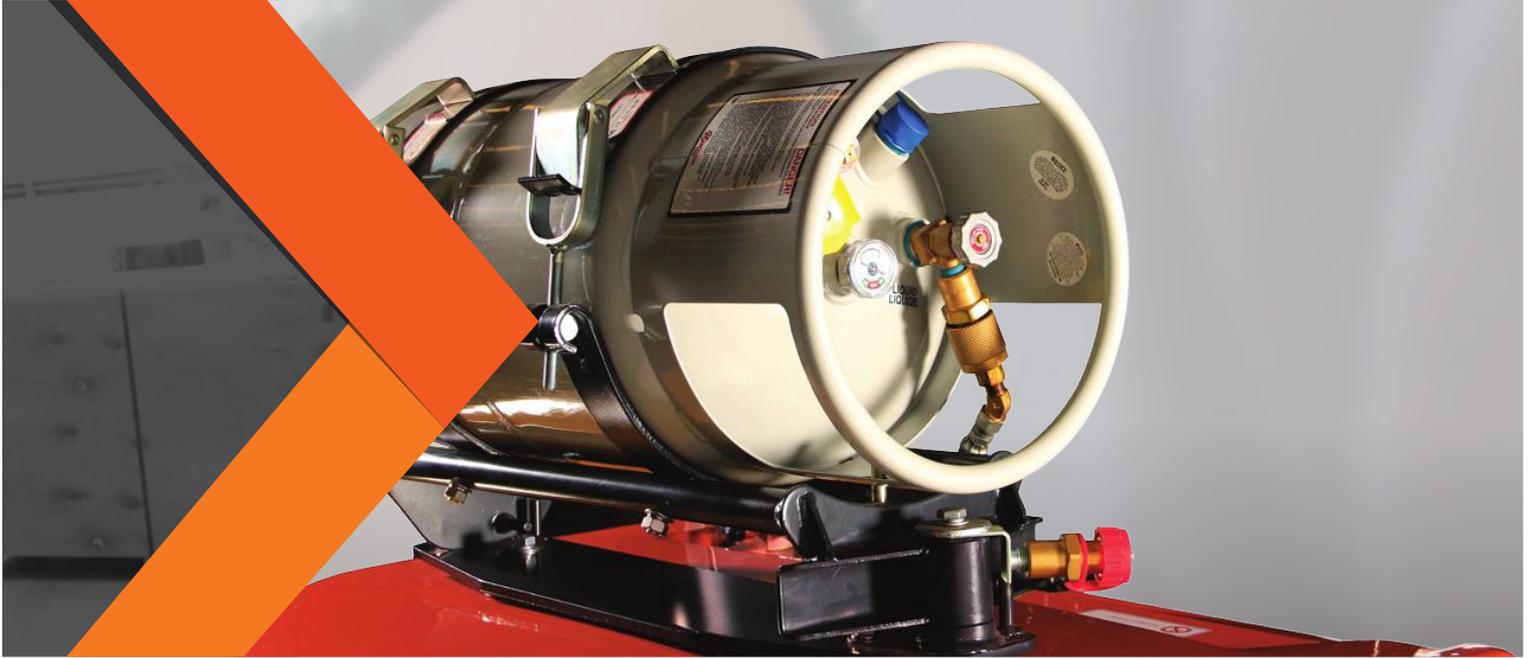

## SPECIFICATIONS

MODEL		CPQYD20-RC1H	CPQYD25-RC1H	CPQYD30-RC1H	CPQYD35-RC1H	
CHARACTERISTICS	Capacity	kg	2000	2500	3000	3500
	Load center	mm	500	500	500	500
	Power mode		Gasoline / LPG			
	Driving mode		Seated			
SPECIFICATIONS	Lifting height (standard)	mm	3000	3000	3000	3000
	Mast overall height	mm	2000	2000	2065	2180
	Max. fork lifting height (With backrest)	mm	4030	4030	4245	4235
	Free lift height	mm	165	165	165	170
	Overall height (Overhead guard)	mm	2150	2150	2170	2170
	Min. ground clearance (At the mast)	mm	115	115	135	135
	Distance from seat to overhead guard	mm	1030	1030	1030	1030
	Traction pin height	mm	275	275	280	280
	Backrest height	mm	1000	1000	1227	1222
	Overall length (With/Without fork)	mm	3500 / 2580	3708 / 2638	3818 / 2748	3836 / 2766
	Wheel base	mm	1650	1650	1700	1700
	Front overhang	mm	473	473	478	496
	Rear overhang	mm	457	515	570	570
	Overall width	mm	1150	1150	1225	1225
	Tread (Front / Rear)	mm	970 / 970	970 / 970	1000 / 970	1000 / 970
	Fork adjustable range	mm	1030 / 244	1030 / 244	1060 / 250	1060 / 250
	Min. turning radius (Exterior)	mm	2170	2240	2400	2420
	Min. turning radius (Interior)	mm	180	180	200	200
	Min. right angle stacking aisle width	mm	2200	2280	2380	2400
	Mast tilting angle (forward / rear)	deg	6° / 12°	6° / 12°	6° / 12°	6° / 12°
Fork size		920 x 122 x 40	1070 x 122 x 40	1070 x 125 x 45	1070 x 125 x 50	
WHEEL	Wheel number x drive wheel		2X / 2			
	Tyre type (Front/Rear)		Pneumatic tyre			
	Tyre size (Front)		7.00-12-12PR	7.00-12-12PR	28x9-15-12PR	28x9-15-14PR
	Tyre size (Rear)		6.00-9-10PR	6.00-9-10PR	6.5-10-10PR	6.5-10-10PR
	Service brake		Hydraulic - foot pedal			
Parking brake		Mechanical - hand lever				

\* The Specification is subject to change without prior notice.